

Compression Force Sensor K-14 with Nominal Force from 0.05 ... 100 kN




Performance Features

- Measurement of the static and dynamic forces
- Simple handling and assembly
- Stainless steel
- Level of protection IP60
- Long-term stability
- Special versions on request

Application

- Equipment engineering
- Automotive industry
- Measuring and control devices
- Fully automated machining centres
- Tool engineering
- Special mechanical engineering

Dimensions of K-14 in mm

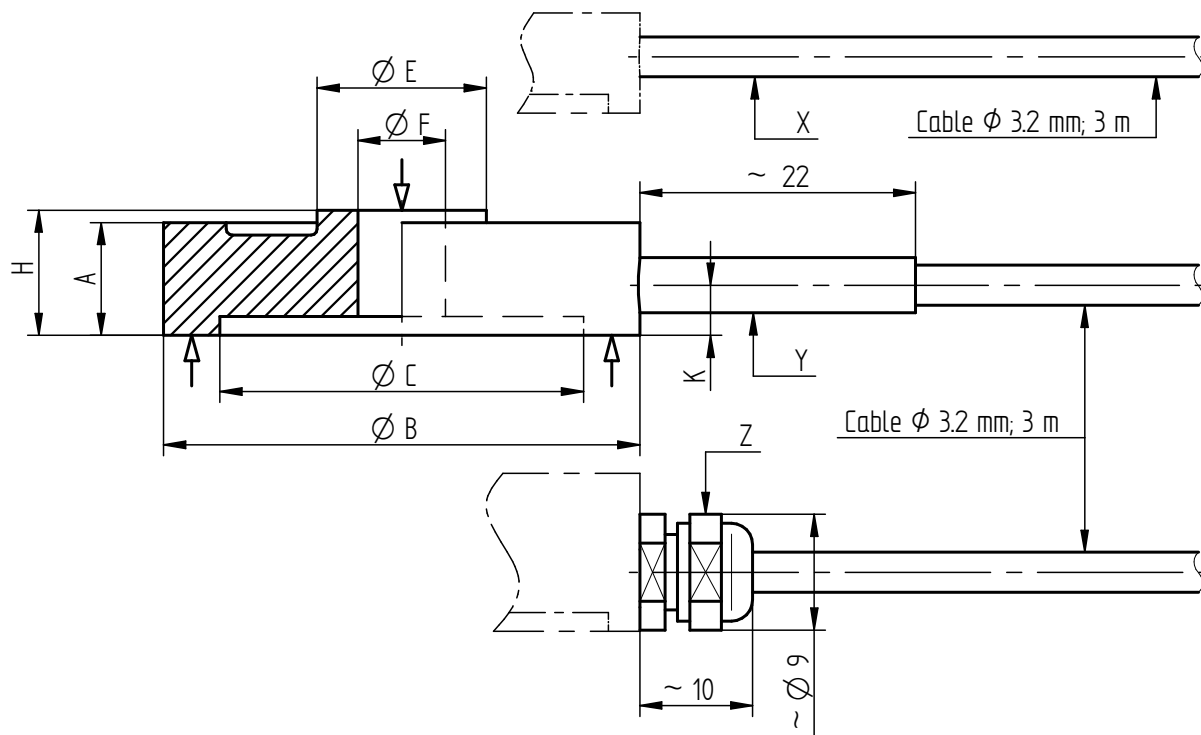

Article-No.	Nominal Force [kN]	Dimensions [mm]										Weight [kg]
		A	ØB	ØC	ØE	ØF	H	K	X	Y	Z	
100588	0.05	8	30	25	9	5.2	9.5	4.5	X	-	-	0.2
100589	0.1											
100590	0.2											
100591	0.5											
100592	1	9	38	29	13.5	7	10	4	-	X	-	0.2
100593	2											
100594	5											
100595	10											
100596	20	15	49	41	23	14	16	4.5	-	-	X	0.3
100597	50											
100598	100											
		24	78	60	42	27	25	7.5	-	-	X	0.8

Pin Connection

Electrical connection

Excitation (-)	green	●
Excitation (+)	brown	●
Signal (+)	yellow	●
Signal (-)	white	○
Control signal (option)	grey	●
Shield	shield	⊕

Technical Data acc. to VDI/VDE/DKD 2638

Compression Force Sensor with Through Hole K-14

Nominal force F_{nom}	kN	0.05	0.1	0.2	0.5	1	2	5	10	20	50	100
Accuracy class	% F _{nom}	0.5										
Rel. repeatability error in unchanged mounting position b_{rg}	% F _{nom}	0.2										
Relative creep	% F _{nom} /30 min	<±1										
Rated characteristic value C_{nom}	mV/V	1.00 ±20%										
Input/output resistance R_e/R_a	Ω	350										
Insulation resistance R_{is}	Ω	>2*10 ⁹										
Rated range of excitation voltage B_{U, nom}	V	2 ... 12										
Electrical connection		Cable, PURS, 3 m with free strands										
Reference temperature T_{ref}	°C	23										
Rated temperature range B_{T, nom}	°C	-10 ... 70										
Operating temperature range B_{T, G}	°C	-30 ... 80										
Storage temperature range B_{T, S}	°C	-50 ... 95										
Temperature effect on zero signal TK₀	% F _{nom} /10 K	±0.2										
Temperature effect on characteristic value TK_C	% F _{nom} /10 K	±0.2										
Maximum operating force F_G	% F _{nom}	130										
Force limit F_L	% F _{nom}	150										
Breaking force F_B	% F _{nom}	>300										
Permissible oscillation stress F_{rb}	% F _{nom}	70										
Rated displacement S_{nom}	mm	<0.15										
Material		Stainless steel										
Level of protection		IP60										

Options

Article-No.	Description	
100218	Control signal	100 % F _{nom}
100896	Nominal sensitivity adjustment	
42828	Extended temperature range	-30 °C ... 100 °C
42829	Extended temperature range	-30 °C ... 120 °C [≥0.2 kN]
42830	Extended temperature range	-40 °C ... 150 °C [≥0.2 kN]
103954	Calibration in kg or t	
107592	6-wire connection	

Calibrations

Article-No.	Description	
400628	Linearity diagram in accordance to factory standard	25 % steps
400170	Linearity diagram in accordance to factory standard	10% steps
400960	Proprietary calibration acc. to DIN EN ISO 376 and DAkKS-DKD-R 3-3	3 steps
400652	Proprietary calibration acc. to DIN EN ISO 376 and DAkKS-DKD-R 3-3	5 steps
400640	Proprietary calibration acc. to DIN EN ISO 376 and DAkKS-DKD-R 3-3	8 steps
	DAkKS-Calibration / Standard on request	

Accessories

Cable and input connector

Article-No.	Description
10323	Cable connector KS6 (6-pin series 581) incl. sensor mounting
10320	Cable connector KSSH15 (15-pin) incl. sensor mounting
43418	Input connector ZA9612FS (ALMEMO) incl. sensor mounting and connector calibration
49205	Input connector ZKD712FS (ALMEMO 202) incl. sensor mounting and connector calibration

Amplifiers

Examples of suitable amplifiers for the compression force sensor K-14:

LCV	SI-USB	GM 40	GM 80	GM 80-PA
				

Further suitable amplifiers you can find on our homepage under www.lorenz-messtechnik.de.