

Industrial Panel Computer, Aladdin Family

ALAD-K1220T

12.1" TFT LCD Capacitive/Resistive Touch, Intel® Skylake-U/Kabylake-U CPU, 2*LAN, 4*USB3.0, 1* Line out, DC 9~36V, IP 65 Front panel.




KeyFeatures

- Aluminum die-casting chassis, fanless design
- 12.1" LED TFT LCD, capacitive/resistive touch
- Intel® Skylake-U/Kabylake-U CPU
- 1*DDR4 2133 SODIMM, Max 16GB
- 1*Mini PCIe (PCIe+ USB)
- 2*COM, 2*LAN, 4*USB3.0, 1*USB2.0, 1*Line out
- 2.5" HDD Bay, 1*mSATA
- ATX button&remote button
- DC 9~36V powerinput



ALAD-K1220T-G is an intelligent, fanless embedded panel, the system powered by Intel® Skylake-U/Kabylake-U Celeron and Core I3/I5/I7 CPU. Supports 12.1 inch 1024*768@60Hz TFT LCD. It offers multiple I/O interface, 1*2.5" easy-pluggable SATA bay and 1*mSATA for storage, 1*MiniPCIe socket (PCIex1+ USB signal) for expansion. DC 9~36V wide powerinput, be fit for use in MES and machines HMI.

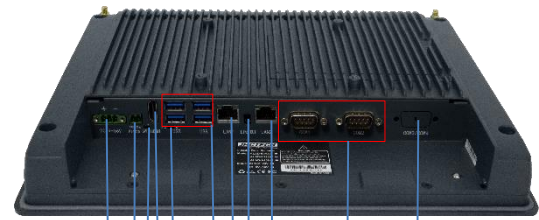

DC9-36V Remote SW CMOS AT/ATX HDMI 4*USB3.0 LAN Lineout 2*COM Opt.COM3/4


SPEC

System	CPU	Gen. 6th Intel® Skylake-U Celeron 3855U; Core I3-6100U; I5-6200U; I7-6500U CPU
	Chipset	Gen. 7th Intel® Kabylake-U Celeron 3865U; Core I3-7100U; I5-7200U; I7-7500U CPU
	System Memory	Intel® SOC
	BIOS	1*DDR4 2133 MHz SODIMM, Max 16GB
	Storage	Insyde SPI 64Mbit flash
	Display	1*2.5" SATA HDD bay, support SATA3.0 6Gbps HDD/SSD, 1*mSATA
	Touch	12.1" LED backlight TFT LCD and HDWI(4K resolution), dual display, Intel® HD graphics 510/520
	Expansion	5 wire resistive touch optional projected capacitive touch, USB control
	Audio	1*Mini PCIe (PCIe&USB signal)
	Real I/O	Realtek ALC662VD controller, Support 5.1 channel, 2*3W Speaker
	Front I/O	2*COM: 2*RS232/422/485, DB9
	LAN	1*HDMI, 1*Line out
	Mechanical & Environmental	Control SW/LED
Power Supply		2*RJ45
OS		1*USB2.0 Type A
Construction		2*Intel I210AT PCIe Gig. Ethernet, 10/100/1000Mbps
Operating Temperature		1*Cmos, 1*AT/ATX, Power button, 2-pin connector with power switch signal, HDD LED
Storage Temperature		DC to DC: 9~36V input, consumption: TDP 12V/2.75A(Intel® I5-6200U CPU, 4GBDDR4)
Storage Humidity		Windows 7, Windows 8.1, Windows 10, Linux
Shock		Aluminum die-casting front bezel, fin-shaped radiator shell
Vibration		0~50°C -HDD(-10~55°C -SSD), with airflow
Mounting		-20~60°C
Dimension	10~95%@40, non-condensing	
Net Weight	10g peak acceleration(duration 11ms), in operating with HDD	
EMC	1g 5~500Hz, in operating with HDD	
	Panel mounting, VESA 100*100, Rack mounting	
	(W*H*D):315*259*51mm; mounting cut out(W*H): 303*247mm	
	2.8kg	
	CE, FCC Class A	

LCD	Type	12.1" TFT LED	
	Resolution	1024*768	
	Color	16.2M colors	
	Pixel Pitch(mm)	0.240*0.240	
	Brightness(cd/m2)	500	
	Viewing Angle	80 Degree(left), 80 Degree(right), 70 Degree(up), 70 Degree(down)	
	Operating Temperature	-30~70℃	
	Backlight Lifetime	50,000 hours	
Touch	Type	5 wire resistive touch	Projected capacitive touch
	Resolution	gapless	gapless
	Light Transmittance	83%	90%
	Interface	USB	USB
	Consumption	+ 5V @ 200mA	+ 5V @ 300mA
	OS	Windows/Linux	Windows/Linux
	Click Lifetime	35 milliontimes	3 billion times

Dimension

Unit: mm

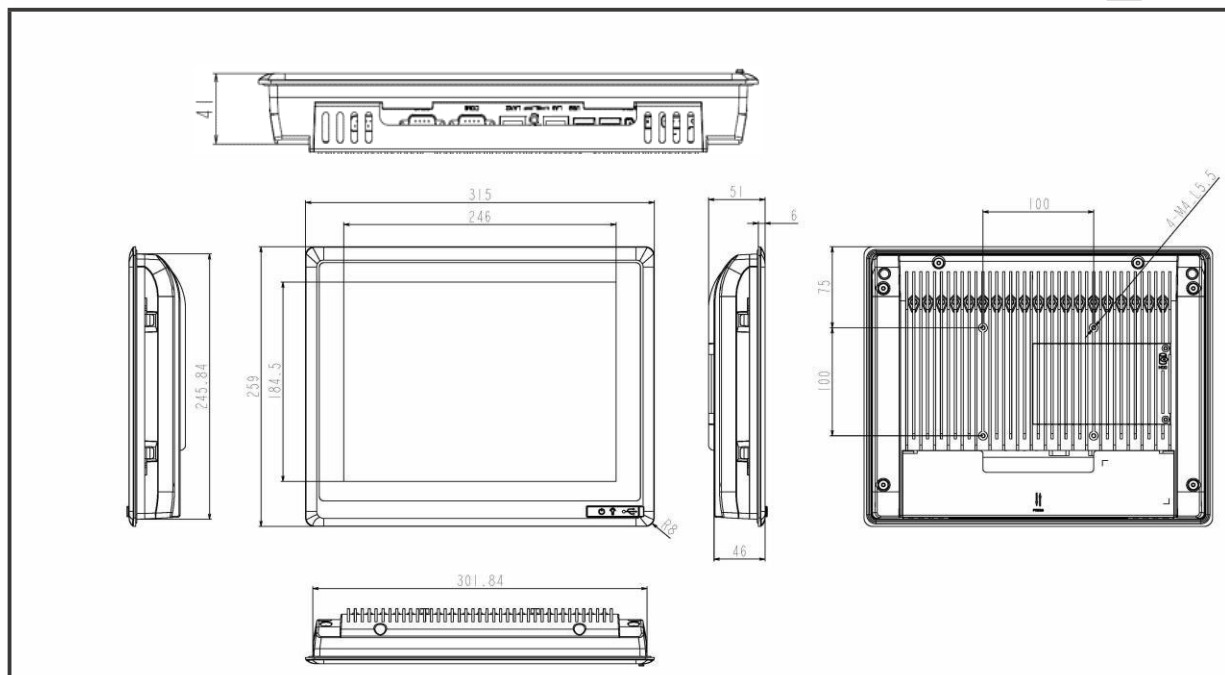

Ordering Info.

Model NO.	CPU	TOUCH	Description
ALAD-K1220T/T001-G	Intel®I3-6100U/I3-7100U	5 wire resistive touch	Industrial panel computer, 12.1" TFT LCD, 2*COM(2*RS232/422/485), 5*USB, 2*LAN, 1*Mini PCIe, HDMI, 1*Line out, 1*2.5" SATA bay 1*mSATA, 2*3W speaker, DC 9~36V power input
ALAD-K1220T(P)/T001-G	Intel®I3-6100U/I3-7100U	projected capacitive touch	
ALAD-K1220T/T002-G	Intel®I5-6200U/I5-7200U	5 wire resistive touch	
ALAD-K1220T(P)/T002-G	Intel®I5-6200U/I5-7200U	projected capacitive touch	
ALAD-K1220T/T003-G	Intel®I7-6500U/I7-7500U	5 wire resistive touch	
ALAD-K1220T(P)/T003-G	Intel®I7-6500U/I7-7500U	projected capacitive touch	
ALAD-K1220T/T004-G	Intel® Celeron 3855U/3865U	5 wire resistive touch	
ALAD-K1220T(P)/T004-G	Intel® Celeron 3855U/3865U	projected capacitive touch	
PA-60DC12	AC/DC power adapter, DC12V/5A60W		

* All specifications and photos are subject to change without notice.

www.jhctech.com © 2020 Jhctech.Co., Ltd. All rights reserved.

Updated Jul., 10th, 2020