IES3016 series

Industrial Ethernet switches

User manual

Shenzhen 3onedata Technology Co., Ltd.

Tel: +86-755-26702668 Fax: +86-755-26703485

www.3onedata.com

【Summarize】

IES3016 series is a Plug-and-play unmanaged industrial Ethernet switch. The IES3016 industrial Ethernet switches consists of 16 Ethernet ports. The IES3016-2F consists of 14 Ethernet ports and 2 Fiber ports. The IES3016-4F consists of 12 Ethernet ports and 4 Fiber ports. The IES3016-6F consists of 10 Ethernet ports and 6 Fiber ports. The IES3016-8F consists of 8 Ethernet ports and 8 Fiber ports that provide an economical solution for your industrial Ethernet connection. It supports auto flow control, full/half duplex mode and MDI/MDI-X self-adaption. Product accorded to CE, FCC standard and Industry grade 4 design requirement, support 2 redundant power input and -40～75℃ working temperature, can meet all kinds of Industrial environment requirement. It can use in power, water conservancy, transportation area etc. The switch support AC power input series and DC power input series optional.

【Packing list】

Please check the packaging and accessories by your first using.

- Industrial Ethernet switch x 1
- User manual x 1
- Certificate of quality x 1
- Warranty card x 1

Please inform us or our distributor if your equipments have been damaged or lost any accessories, we will try our best to satisfy you.

【Feature】

High performance network exchange technology

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x
- Support MAC address auto-learning, auto-aging
- Support flow control
- Support 8K MAC address
- Support 12.8Gbps backboard bandwidth
- DC power input series support redundancy power supply(12～48VDC)
- AC power input series support AC power supply(100～240VAC/DC)

Reliable Industrial grade design

- Industrial grade 4 design, -40-75℃work temperature
- No fan deign
- IP40 protection grade
- DIN rail

【Panel layout】

Rear view

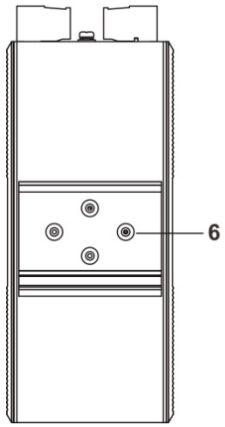

Vertical view and bottom view

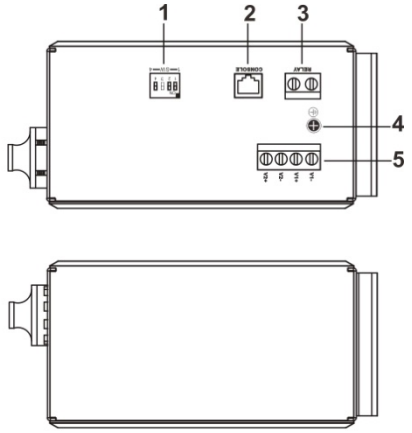

Front panel view

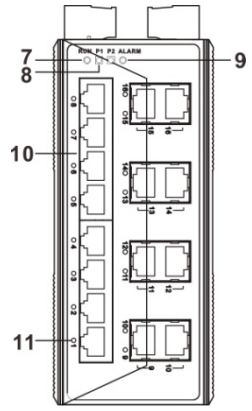

IES3016

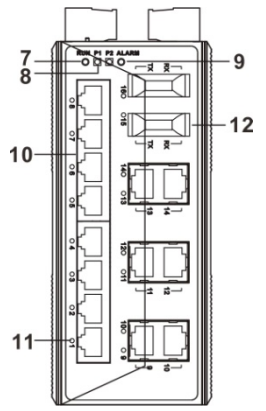

IES3016-2F

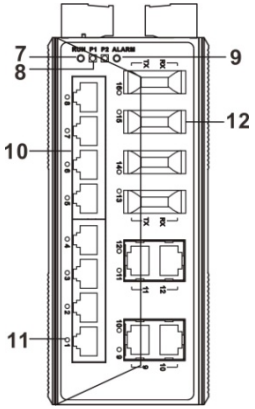

IES3016-4F

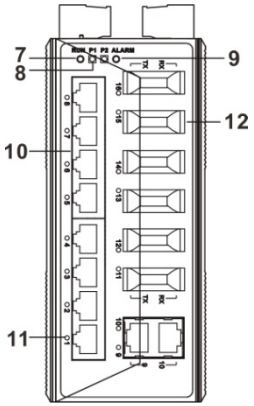

IES3016-6F

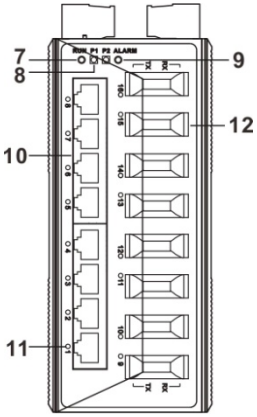

IES3016-8F

1. DIP switches (Retain)
2. Console port (Retain)
3. 2-pin terminal block for relay output (Retain)
4. Ground screw
5. Power input terminal block
6. DIN-Rail mounting kit
7. System running LED
8. Power indicator
9. Relay alarm LED
10. Link/ACT LEDs
11. 10Base-T /100Base-TX Ethernet port
12. 100Base-FX fiber port

【Appearance and dimension】

The series of products are the same size, and the number of the Ethernet interface is different. Unit (mm)

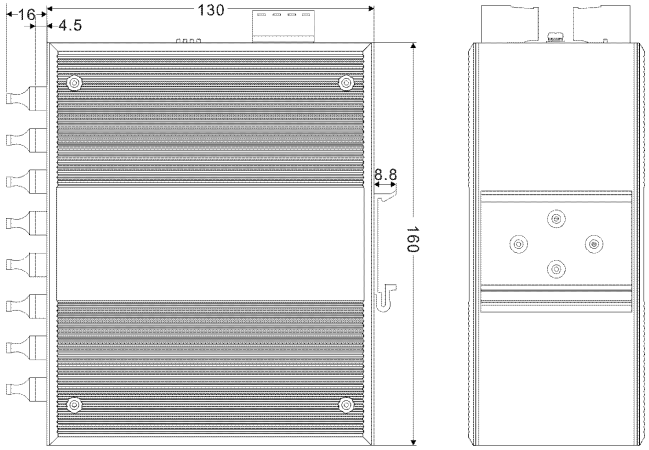

【Power supply input】

DC Series Switch:



The product top panel provided 4 bit power supply input terminal block, support DC input. DC power supply input supported redundancy function, provided PWR1 and PWR2 power input, can use for single, and can connect 2 separately power supply system, use 1 pair terminal block connect the device at the same time. If one of the power systems broke, the device can work un-interruptible. Built-in overcorrect protection, Reverse connection protection. Voltage input range is 12～48VDC（terminal block defined as: V1-、V1+、V2-、V2+）.

AC Series Switch:



The Industrial Ethernet switches have singe power and redundancy power two kinds of power input. The singe power AC series top panel provides 3 bit terminal block for AC100~240V power entered (L/+, PG, N/-)

Important notice:

1. Power ON operation: first of all, insert power cable's terminal block into device's power port, then insert power supply plug into power source
2. Power OFF operation: First off all, unpin power plug, then strike the terminal block, please take care of operation sequence.

【Communication connector】

10/100BaseT(X) Ethernet port

The pinout of RJ45 port display as below, connect by UTP or STP. The connect distance is no more than 100m. 100Mbps is used 120Ω of UTP 5; 10Mbps is used 120Ω of UTP 3, 4, 5.

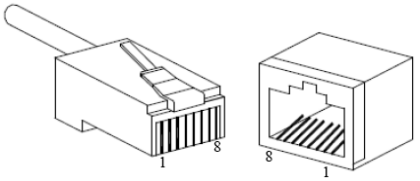

RJ 45 port support automatic MDI/MDI-X operation. Can connect the PC, Server, Converter and HUB .Pin 1,2,3,6 Corresponding connections in MDI. 1→3, 2→6, 3→1, 6→2 are used as cross wiring in the MDI-X port of Converter and HUB. 10Base-T/100Base-TX are used in MDI/MDI-X, the define of Pin in the table as below.



NO.	MDI signal	MDI-X signal
1	TX+	RX+
2	TX-	RX-
3	RX+	TX+
6	RX-	TX-
4, 5, 7, 8	—	—

Note：“TX±”Transmit Data±，“RX±”Receive Data±，“—”Not Use.

MDI (straight-through cable)

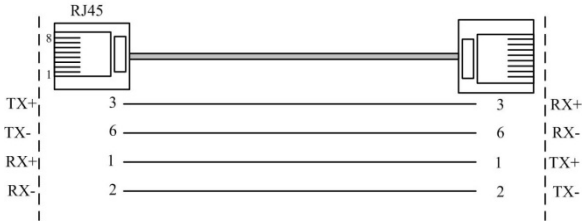

MDI-X (Cross over cable)

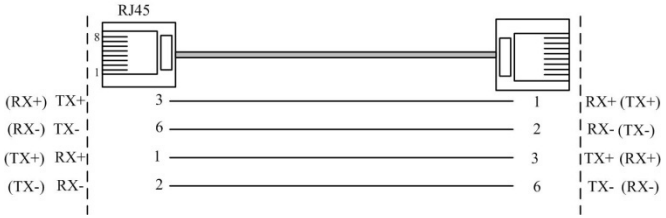

MDI/MDI-X auto connection makes switch easy to use for customers without considering the type of network cable.

100Base-FX Fiber port

100Base-FX full-duplex SM or MM port, SC/ST/FC type .The fiber port must be used in pair, TX (transmit) port connect remote switch’s RX (receive) port; RX (receive) port connect remote switch’s TX (transmit) port.

The optical fiber connection supports the line to instruct enhance the reliability of network effectively.

Suppose: If you make your own cable, we suggest labeling the two sides of the same line with the same letter (A-to-A and B-to-B, shown as below, or A1-to-A2 and B1-to-B2).

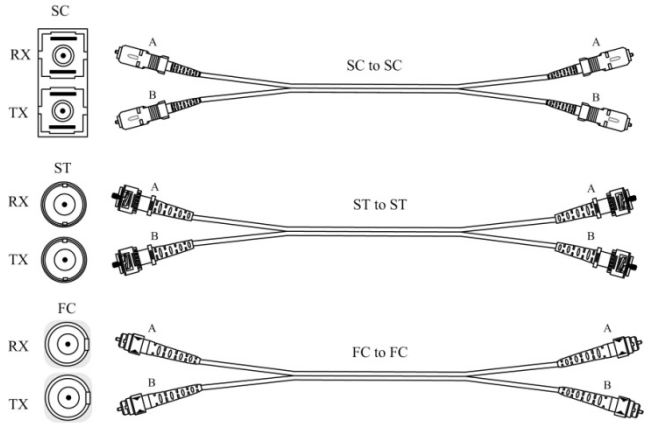

【LED Indicator】

LED indictor light on the front panel of product, the function of each LED is described in the table as below.

System Indication LED		
LED	State	Description
PWR (P1, P2)	ON	Power is being supplied to power input PWR input
	OFF	Power is **not** being supplied to power input PWR input
RUN	ON/OFF	System is not running well
	Blinking	System is running well
Link/ACT (1~16)	ON	Port connection is active
	Blinking	Data transmitted
	OFF	Port connection is not active
ALARM	ON	Has alarm information
	OFF	No alarm information

【Installation】

Before installation, confirm that the work environment meet the installation require, including the power needs and abundant space. Whether it is close to the connection equipment and other equipments are prepared or not.

1. Avoid in the sunshine, keep away from the heat fountainhead or the area where in intense EMI.
2. Examine the cables and plugs that installation requirements.
3. Examine whether the cables be seemly or not (less than 100m) according to reasonable scheme.
4. Power: DC dual power supply series products 12 ~ 48VDC
   AC single power supply series products 100~240VAC/DC
5. Environment: working temperature -40～75℃
   Storage Temperature: -40～85℃
   Relative humidity 5%～95%

DIN Rail Installation

In order to use in industrial environments expediently, the product adopt 35mm DIN-Rail installation, the installation steps as below:

1. Examine the DIN-Rail attachment
2. Examine DIN Rail whether be firm and the position is suitability or not.
3. Insert the top of the DIN-Rail into the slot just below the stiff metal spring.
4. The DIN-Rail attachment unit will snap into place as shown below.

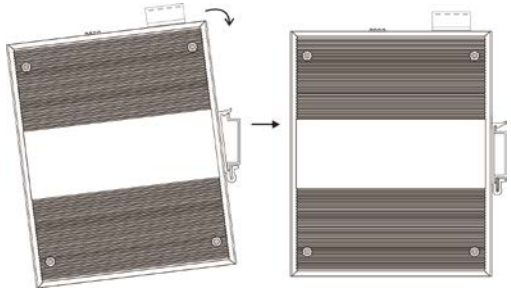

Wiring Requirements

Cable laying need to meet the following requirements,

1. It is needed to check whether the type and specification of cable match the requirement before cable laying;
2. It is needed to check the cable is damaged or not, factory records and quality assurance booklet before cable laying;
3. The required cable specification, quantity, direction and laying position need to match construction requirements, and cable

length depends on actual position;

4. All the cable cannot have break-down and terminal in the middle;
5. Cables should be straight in the hallways and turning;
6. Cable should be straight in the groove, and cannot beyond the groove in case of holding back the inlet and outlet holes. Cables should be banded and fixed when they are out of the groove;
7. User cable should be separated from the power lines. Cables, power lines and grounding lines cannot be overlapped and mixed when they are in the same groove road. When cable is too long, it cannot hold down other cable, but structure in the middle of alignment rack;
8. Pigtail cannot be tied and swerved as less as possible. Swerving radius cannot be too small (small swerving causes terrible loss of link). Its banding should be moderate, not too tight, and should be separated from other cables;
9. It should have corresponding simple signal at both sides of the cable for maintaining.

【Specification】

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE 802.3x,

Flow control: IEEE802.3x flow control, back press flow control

Exchange attribute

100M forward speed: 148810pps

Transmit mode: store and forward

System exchange bandwidth: 12.8G

MAC address table: 8K

Memory: 4M

Interface

Electric port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect

100M optic fiber port: 100Base-FX, SC/ST/FC connector, support single mode （20/40/60/80Km optional）, multi mode (2Km), wavelength: 1310nm, 1550nm

Transfer distance:

Twisted cable: 100M (standard CAT5/CAT5e cable)

Multi-mode: 1310nm, 2Km

Single-mode: 1310nm, 20/40/60Km

1550nm, 80/100/120Km

LED indicator:

Run indicator: Run

Interface indicator: Link (1~16)

Power supply indicator: PWR (P1, P2)

Power supply

⌑ DC Series

Input voltage: 12~48VDC

Support DC dual power supply redundancy

⌑ AC Series

Input voltage: 100~240VAC/DC

Type of input: 4 bit terminal block

Consumption

➢IES3016-P (12~48VDC):

Unload consumption: 4.83W@24VDC

Full load consumption: 7.30W@24VDC

➢IES3016-2F-P (12~48VDC):

Unload consumption:6.12W@24VDC

Full load consumption: 8.33W@24VDC

➢IES3016-4F-P (12~48VDC):

Unload consumption: 7.6W@24VDC

Full load consumption: 9.29W@24VDC

➢IES3016-6F-P (12~48VDC):

Unload consumption: 8.79W@24VDC

Full load consumption: 10.49W@24VDC

➢IES3016-8F-P (12~48VDC):

Unload consumption: 10.18W@24VDC

Full load consumption: 10.26W@24VDC

Working environment:

Working temperature: -40～75℃

Storage temperature:-40～85℃

Relative Humidity: 5%~95% (no condensation)

Mechanical Structure:

Shell: IP40 protect grade, metal shell

Installation: DIN-Rail

Size (W×H×D): 160mm×70mm×130mm

Industry Standard:

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 4

EN61000-4-3 (RS), Level 3

EN61000-4-4 (EFT), Level 4

EN61000-4-5 (Surge), Level 4

EN61000-4-6 (CS), Level 3

EN61000-4-8, Level 5

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Certification

CE, FCC, RoHS, UL508 (Pending)

Warranty: 5 years