

NP308T-8DI (RS-485)

8-Port RS-485/422 to Ethernet (10/100M)

Serial Device Server

Features

- Support 10/100M Ethernet
- Support 8 Port RS-485/422
- Support WEB and Telnet configuration
- Support TCP, UDP, ARP, ICMP, DHCP and DNS protocol
- Support TCP Server, TCP Client, TCP Auto, UDP and Real COM driver working mode
- Support UDP multicast and UDP subnet mode
- Support heartbeat time and time over disconnect function
- Support cross-gateway and cross-router communication
- Support virtual serial COM port access and Network interruption automatic recovery
- Provide Windows configuration tools for easy to use, easy to bath install.
- Industrial grade design, IP30 protection grade
- No fan, low consumption design
- Working temperature: -40~75°C



Introduction

NP308T-8DI (RS-485) is a high performance, industrial grade serial to Ethernet server, it can satisfy some kinds of customer requirements in consumption, temperature, volume and handle ability. It provides 8 port RS-485/422(RS-485/422 connector: 5 bit terminal block) and 1 port 10/100Base-Tx Ethernet, can focus manage disperse serial device, master through network, easy, convenience. In application, can configure, upgrade through WEB.

Moreover, NP308T-8DI (RS-485) provide strong function configuration tools based in Windows platform, it can guide user configure the device step by step, all configurations are coming true by WEB or Telnet, support cross-gateway and cross-router, user can flexible configure IP address, server and client mode, data bag size etc.

NP308T-8DI (RS-485) adopts EMC protection design, can work in rugged environment.

Specification

Ethernet port

Standard: 10Base-T, 100Base-TX

Protocol: Support TCP, UDP, APR, ICMP and DHCP

Signal: Rx+, Rx-, Tx+, Tx-

Speed: 10/100Mbps

Working: Full-duplex and half duplex

Working mode: Support TCP Server and Client

Transfer distance: 100m

Connector: RJ45

RS-485/422 port

RS-485/422 port number: 8

RS-422 signal: T+(A), T-(B), R+(A), R-(B)

RS-485 signal: D+(A), D-(B)

Parity bit: None, Even, Odd, Space, Mark

Data bit: 5bit, 6bit, 7bit, 8bit

Stop bit: 1bit, 1.5bit, 2bit

Band rate: 300bps~115200bps

Loading: support 32 nodes loop back

Transfer distance: 1200m

Connector: 4-bit terminal block

Protection: class 3 static, 1.5KVAC isolation

LED Indicator

Working statue indicator: RUN

Power (PWR)

Ethernet port connection statue (Link)

RS-485/422 port transmit data indicator: TX1~TX8

RS-485/422 port receive data indicator: RX1~RX8

Power requirements

Input voltage: 12VDC (9-48VDC)

No-load consumption: 1.81W@12VDC

Full-load consumption: 2.36W@12VDC

Environment limits

Working temperature: -40~75℃

Storage temperature: -40~85℃

Relative humidity: 5%~95% (non-condensing)

Mechanical

Shell: IP30 protection, metal shell

Installation: Wall mounting

Weight: 486g

Size (L×W×H): 160mm×95.5mm×28mm

Standard

EMS: EN 61000-4-2 (ESD), Level 3

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Warranty


Warranty time: 3 years

Certificates

CE, FCC, RoHS, UL508 (pending)

Dimension

Unit (mm)

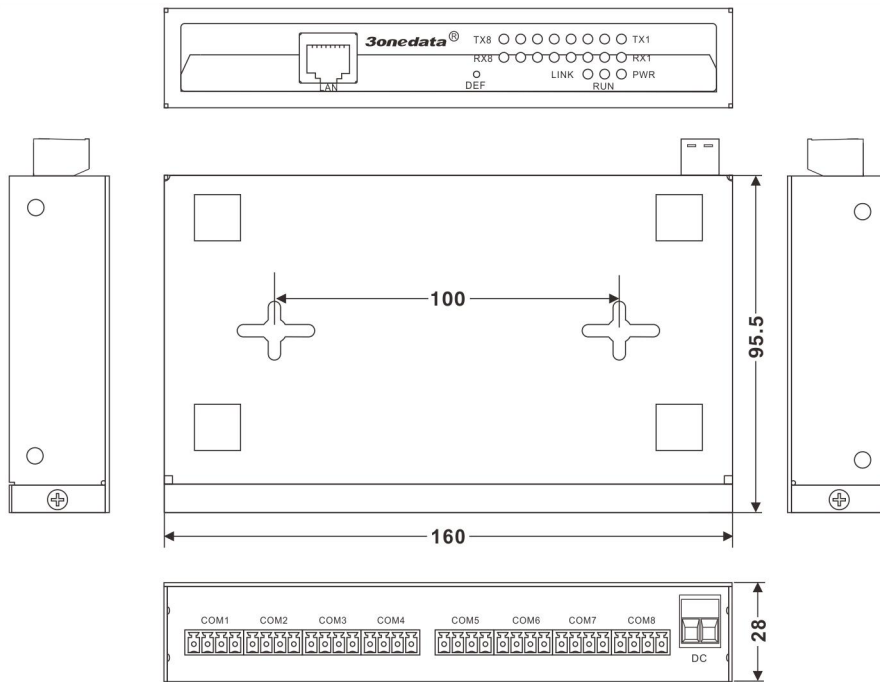

Ordering Information

NP308T-8DI (RS-485) 8-port RS-485/422 to Ethernet (10M/100M), DC9-48V, wall mounting

Packing List

- | | |
|-------------------------------|-------------------------------|
| 1. NP308T-8DI(RS-485) × 1 | 6. Warranty card × 1 |
| 2. User manual × 1 | 7. Certificate of quality × 1 |
| 3. Straight network cable × 1 | 8. Hanger × 2 |
| 4. Power adapter × 1 | 9. Mat × 4 |
| 5. CD-ROM × 1 | |

Optional accessories:

DIN-Rail Mounting Kit (35mm) × 2